

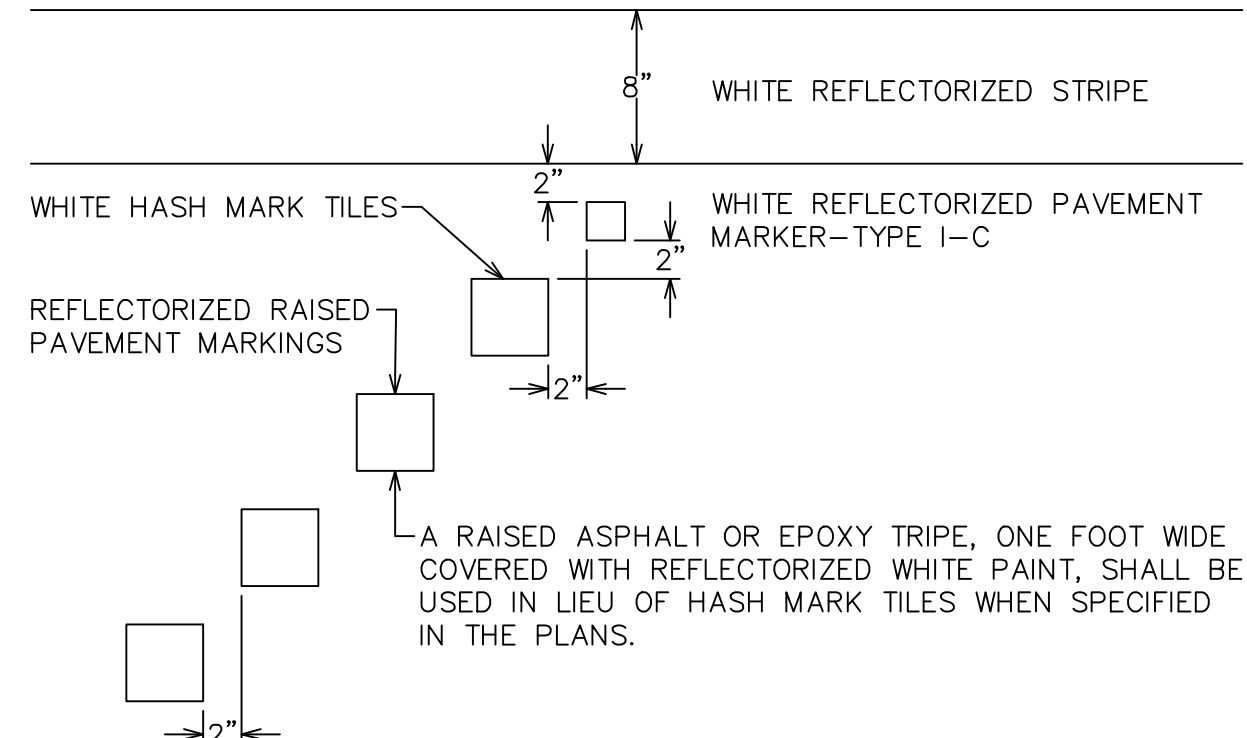
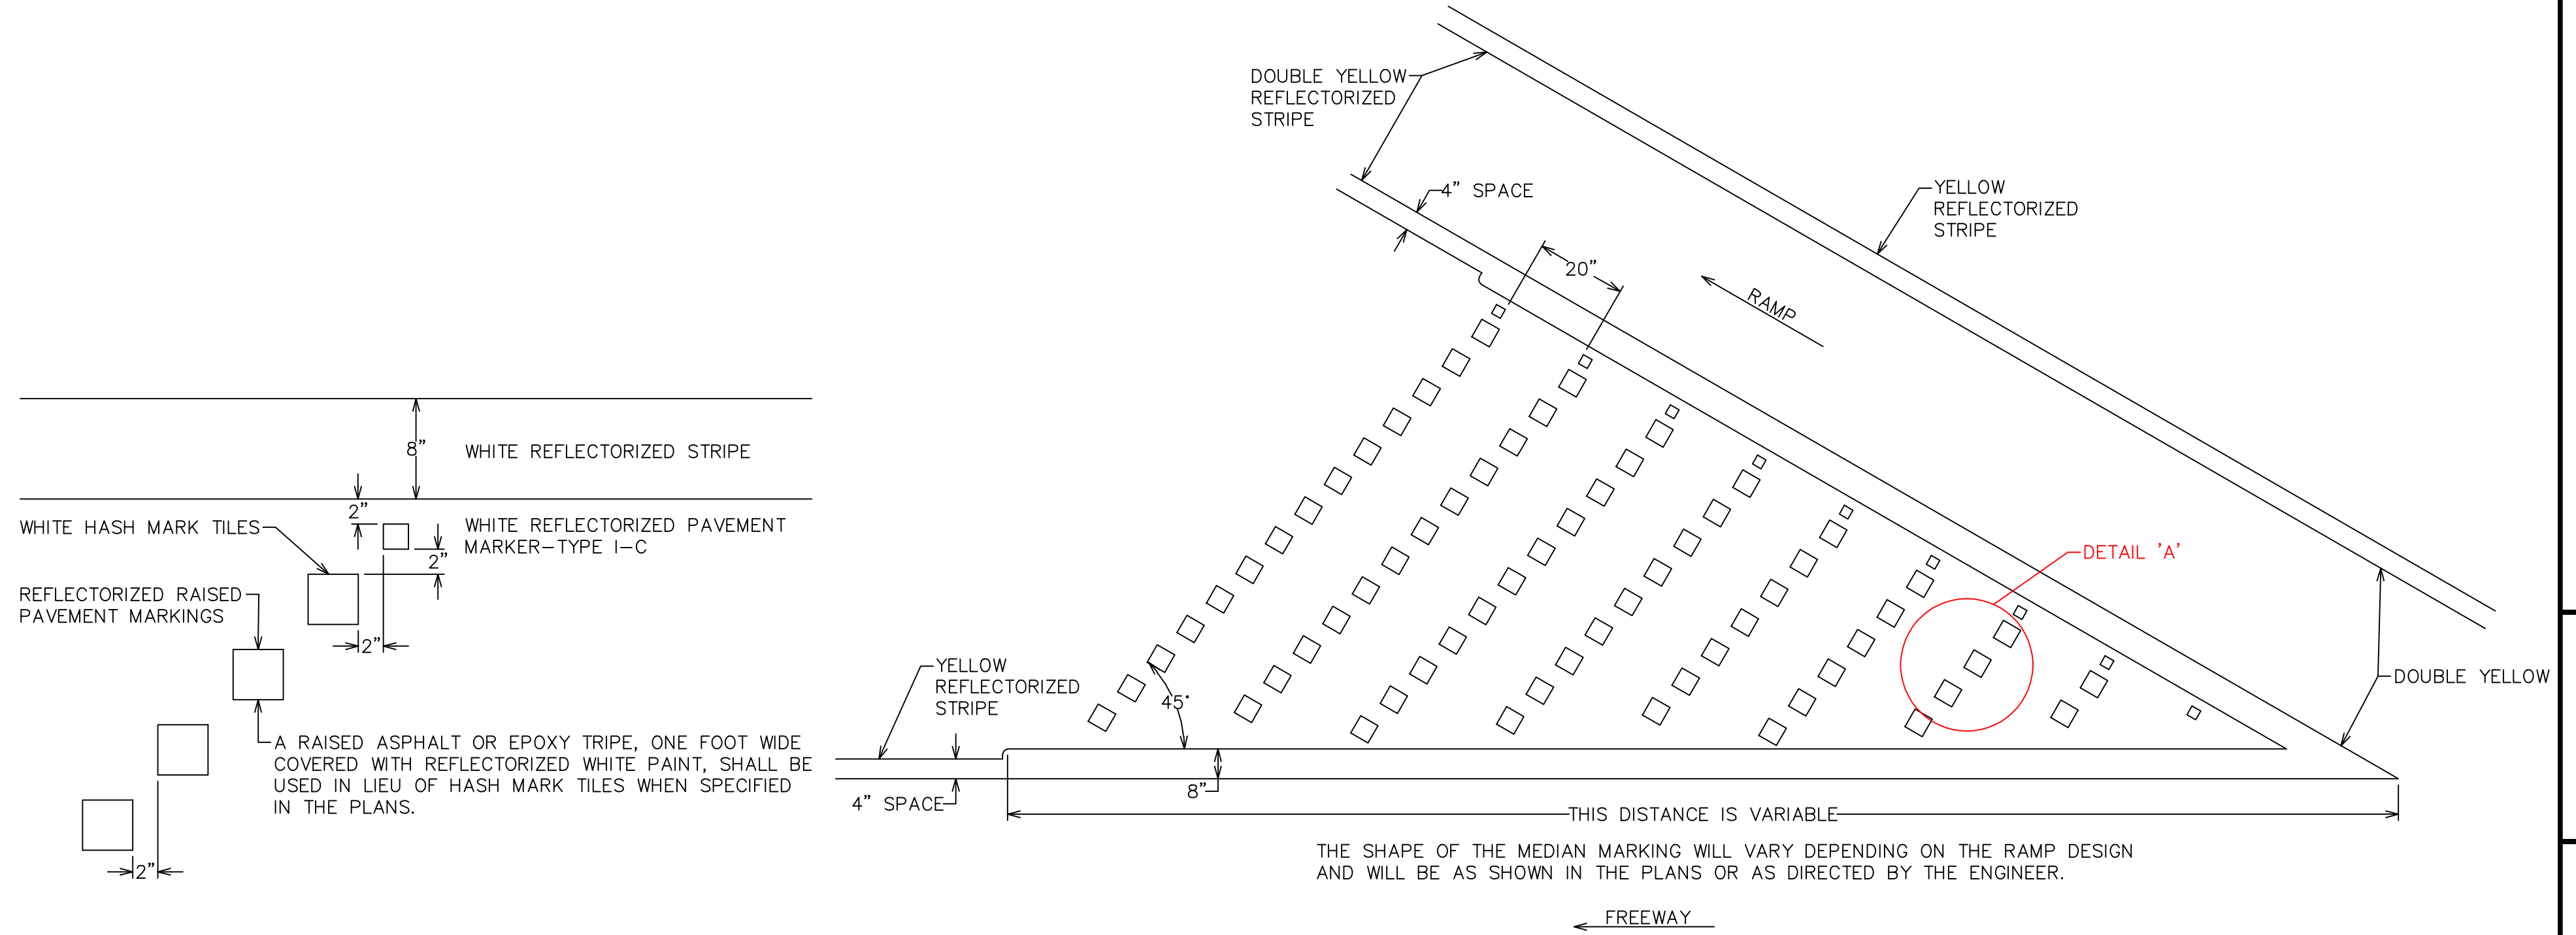


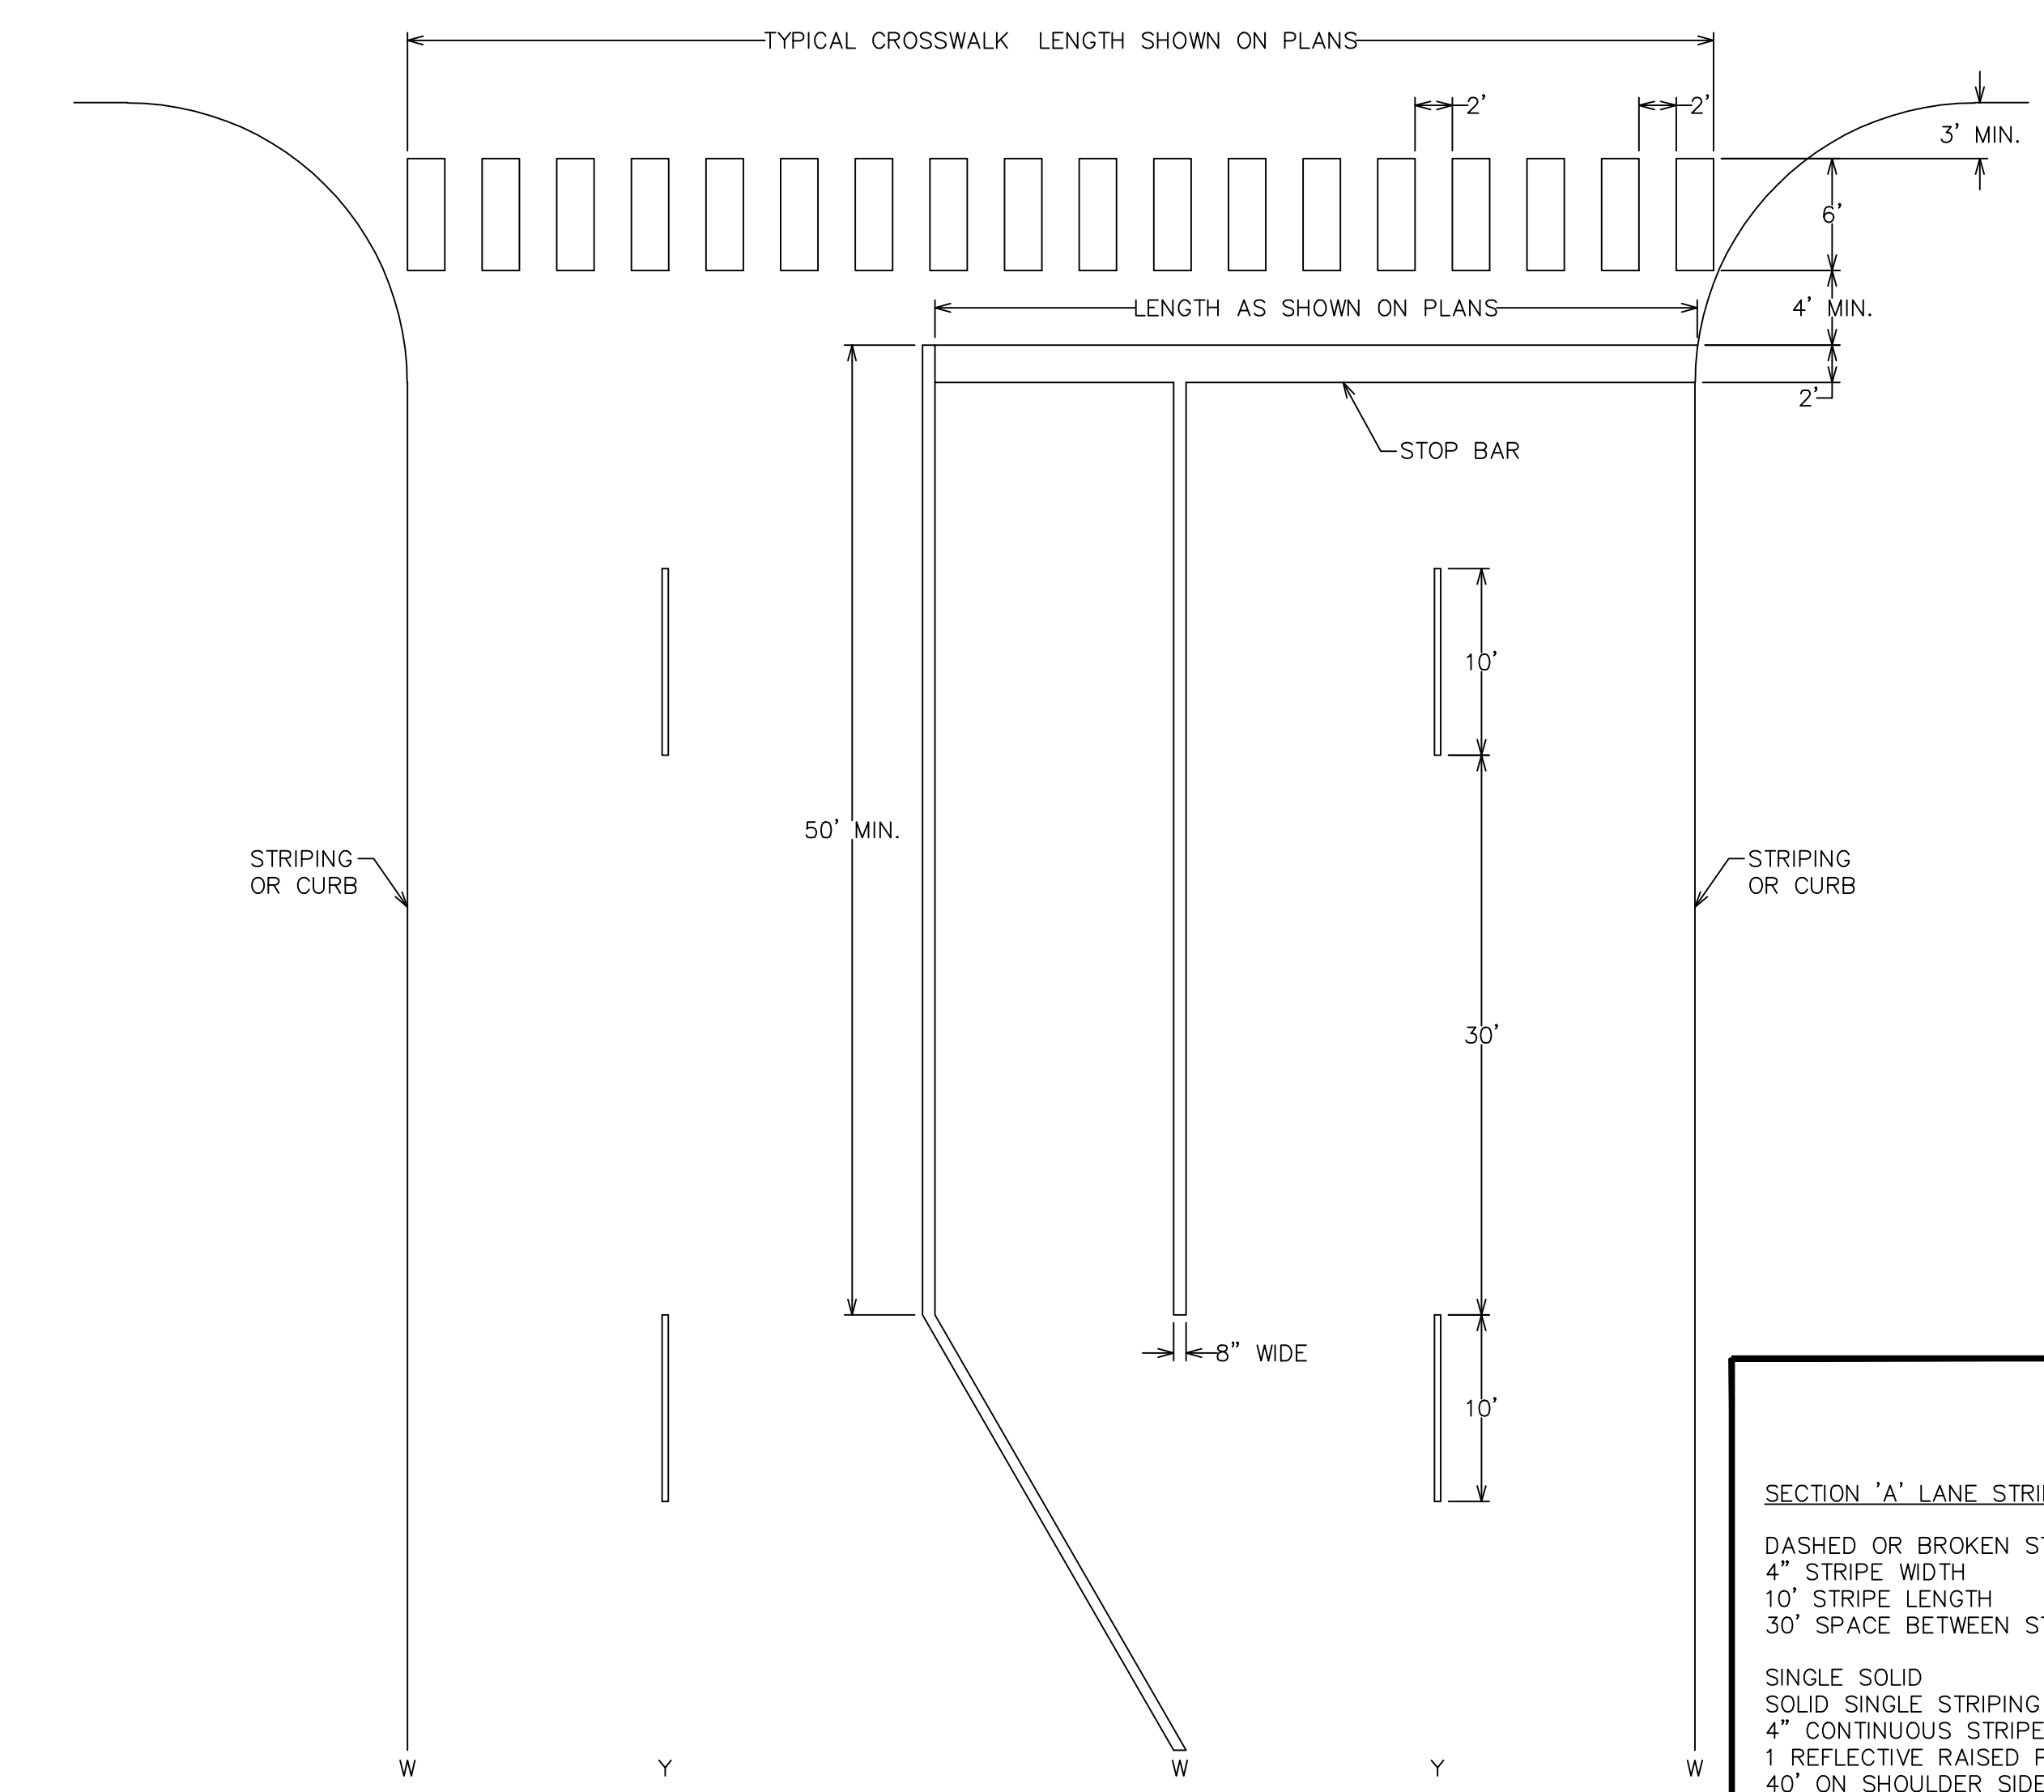

EXCEPTIONS TO THE CITY OF TEMPLE STANDARD DETAILS SHEETS ARE NOT ALLOWED. ANY EXCEPTIONS TO STANDARD DETAILS MUST BE MADE ON SEPARATE SHEETS SUBMITTED FOR REVIEW. FAILURE TO NOTE EXCEPTIONS WILL VOID SUCH CHANGES. CLEARLY NOTE THE SECTIONS AND DETAILS THEY WILL REPLACE. FAILURE TO NOTE EXCEPTIONS WILL VOID SUCH CHANGES. THE CITY OF TEMPLE STANDARD DETAILS SHEETS ARE THE PROPERTY OF THE CITY OF TEMPLE. ANY REUSE OF THESE DETAILS WITHOUT THE WRITTEN PERMISSION OF THE CITY OF TEMPLE IS PROHIBITED. THE CITY OF TEMPLE IS RESPONSIBLE FOR SEALING THE DOCUMENTS IN ACCORDANCE WITH THE RULES OF THE STATE OF TEXAS PROFESSIONAL ENGINEERS REGISTRATION BOARD.

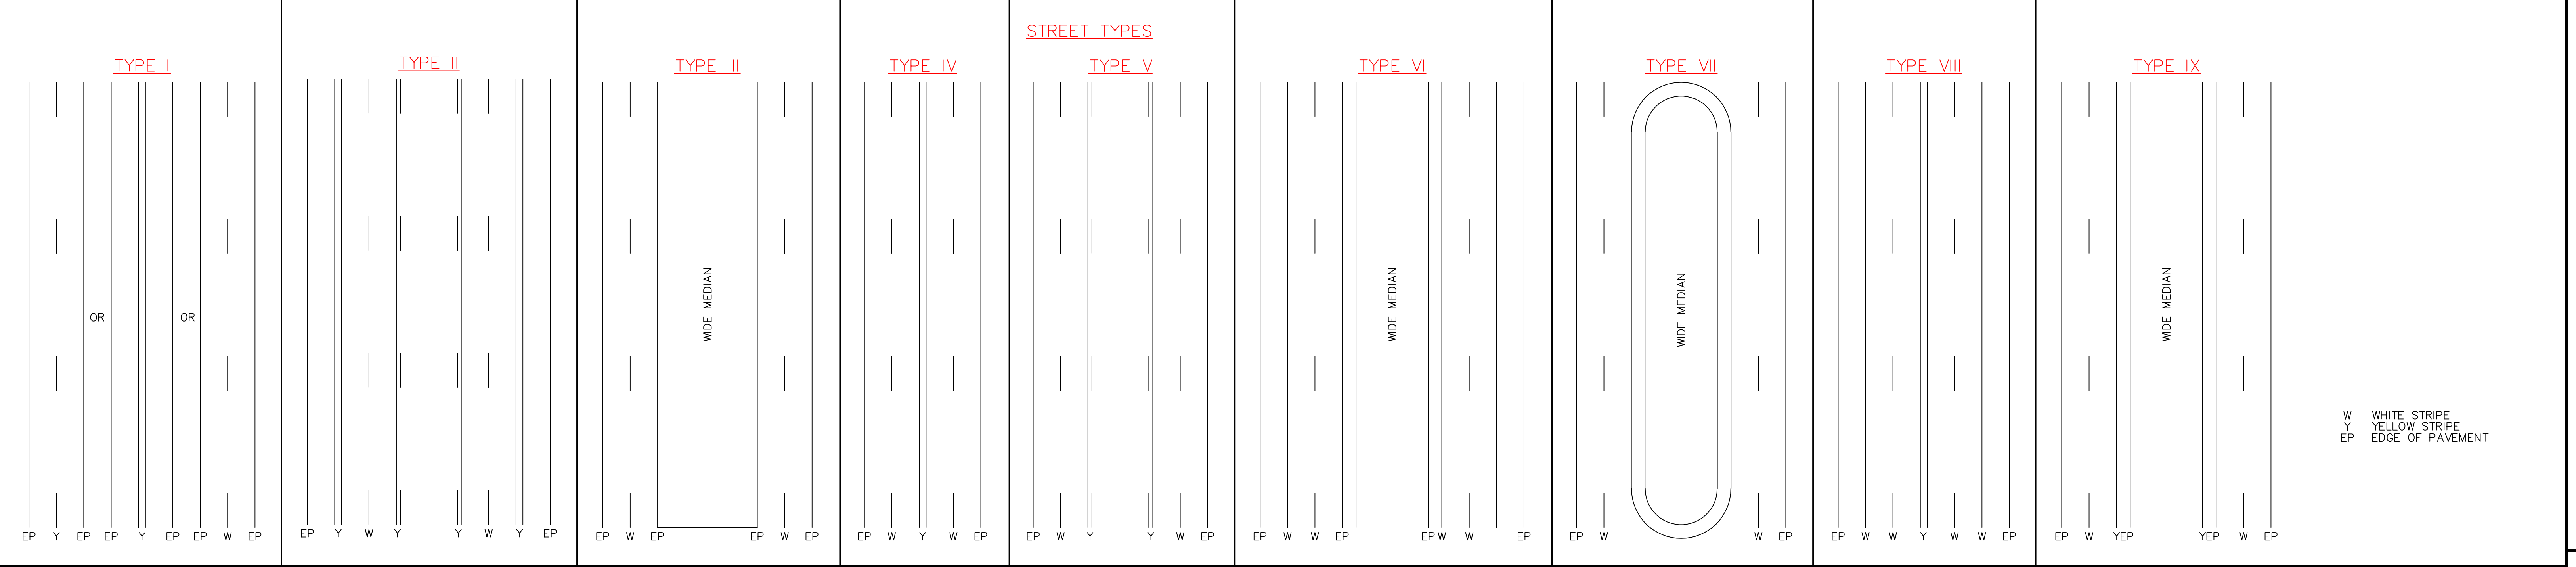

MISC. STRIPING DIMENSIONS

DETAIL 'A'

TYPICAL MEDIAN & HASH MARKS

TYPICAL STRIPED MEDIAN MARKING

**GENERAL NOTES**  
**PAVEMENT MARKINGS**

**SECTION 'A' LANE STRIPING—REFLECTIVE PREFORMED TAPE ONLY**  
 DASHED OR BROKEN STRIPING (SKIP STRIPES)  
 4" STRIPE WIDTH  
 10' STRIPE LENGTH  
 30' SPACE BETWEEN STRIPES  
 SINGLE SOLID  
 SOLID SINGLE STRIPING SHALL BE BID AS FOLLOWS:  
 4" CONTINUOUS STRIPE WIDTH  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 40' ON SHOULDER SIDE OF STRIPE  
 DOUBLE SOLID  
 2 CONTINUOUS STRIPES 4" APART  
 4" STRIPE WIDTH  
 4" SPACE BETWEEN STRIPES  
 WIDE SOLID  
 8" STRIPE WIDTH

**SECTION 'B' LANE STRIPING—REFLECTIVE PREFORMED TAPE & RAISED PAVEMENT MARKERS**  
 DASHED OR BROKEN STRIPING (SKIP STRIPES)  
 4" STRIPE WIDTH  
 10' STRIPE LENGTH  
 30' SPACE BETWEEN STRIPES  
 4 RAISED PAVEMENT MARKERS PER STRIPE  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 80' BETWEEN STRIPES  
 SINGLE SOLID  
 SOLID SINGLE STRIPING SHALL BE BID AS FOLLOWS:  
 4" CONTINUOUS STRIPE WIDTH  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 40' ON SHOULDER SIDE OF STRIPE  
 DOUBLE SOLID  
 2 CONTINUOUS STRIPES OR ROWS  
 8" SPACE BETWEEN CENTER OF 5' SPACING LONGITUDINALLY BETWEEN A SET OF TWO MARKERS  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 20' ON EACH STRIPE FACING ONCOMING TRAFFIC  
 WIDE SOLID  
 8" STRIPE WIDTH  
 5' SPACING ALONG THE LENGTH OF THE STRIPE  
 2 PAVEMENT MARKINGS 4" FROM CENTER TO CENTER TO SIMULATE LINE WIDTH, A SET OF REFLECTIVE EVERY 20'

**SECTION 'C' LANE STRIPING—RAISED PAVEMENT MARKERS ONLY**  
 DASHED OR BROKEN STRIPING (SKIP STRIPES)  
 4" STRIPE LENGTH  
 30' SPACE BETWEEN STRIPES  
 4 RAISED PAVEMENT MARKERS PER STRIPE  
 1 RAISED PAVEMENT MARKER MUST BE REFLECTIVE  
 SINGLE SOLID  
 SOLID SINGLE STRIPING SHALL BE BID AS FOLLOWS:  
 4" CONTINUOUS STRIPE WIDTH  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 40' ON SHOULDER SIDE OF STRIPE  
 DOUBLE SOLID  
 2 CONTINUOUS STRIPES OR ROWS  
 8" SPACE BETWEEN CENTER OF 5' SPACING LONGITUDINALLY BETWEEN A SET OF TWO MARKERS  
 1 REFLECTIVE RAISED PAVEMENT MARKER EVERY 20' ON EACH STRIPE FACING ONCOMING TRAFFIC  
 WIDE SOLID  
 8" STRIPE WIDTH  
 5' SPACING ALONG THE LENGTH OF THE STRIPE  
 2 PAVEMENT MARKINGS 4" FROM CENTER TO CENTER TO SIMULATE LINE WIDTH, A SET OF REFLECTIVE EVERY 20'

**MISCELLANEOUS LANE STRIPING—REFLECTIVE PREFORMED TAPE OR THERMOPLASTIC CROSSWALKS**  
 6" WIDTH WHITE STRIPES  
 2' STRIPE SECTIONS (STRIPE LENGTH)  
 2' SPACES BETWEEN SECTIONS  
 3' MINIMUM SET BACK FROM BACK OF CURB OR EDGE OF PAVEMENT  
 STOP BARS  
 24" WIDTH WHITE STRIPE  
 4" ADVANCE OF SIDEWALK  
 10' FROM EDGE OF INTERSECTING ROADWAY 8' NO CROSSWALK  
 ARROWS  
 ALL ARROWS OR LETTERING SHALL BE WHITE REFLECTIVE PREFORMED TAPE UNLESS SPECIAL APPROVAL IS GIVEN FOR THERMOPLASTIC. ALL RAISED PAVEMENT MARKERS SHALL BE 4" ROUND CERAMIC OR 4" ROUND REFLECTIVE CERAMIC AND INSTALLED AS SHOWN. ALL REFLECTIVE PREFORMED TAPE SHALL BE HOT ISLAND TAPE FOR NEW CONSTRUCTION AND COLD LAND FOR EXISTING STREETS  
 ALL STRIPING SHALL BE REFLECTIVE PREFORMED TAPE 3M HIGH PERFORMANCE SERIES 380 FOR STRIPING & L380 FOR WORDS & SYMBOLS, OR APPROVED EQUAL, UNLESS SPECIAL APPROVAL IS GIVEN FOR THERMOPLASTIC  
 PAVEMENT MARKINGS SHALL BE DESIGNED AND INSTALLED ACCORDING TO CURRENT EDITION OF THE TEXAS MANUAL OF UNIFORMED TRAFFIC CONTROL DEVICES.

STANDARD DETAILS  
 PAVEMENT MARKINGS

CITY OF TEMPLE  
 ENGINEERING DEPARTMENT  
 3210 E. AVE. H, BLD. A, TEMPLE, TX 76501  
 DRAWN BY: CHRIS REAL  
 DATE: 27 JANUARY 2009  
 SCALE: N.T.S.

